


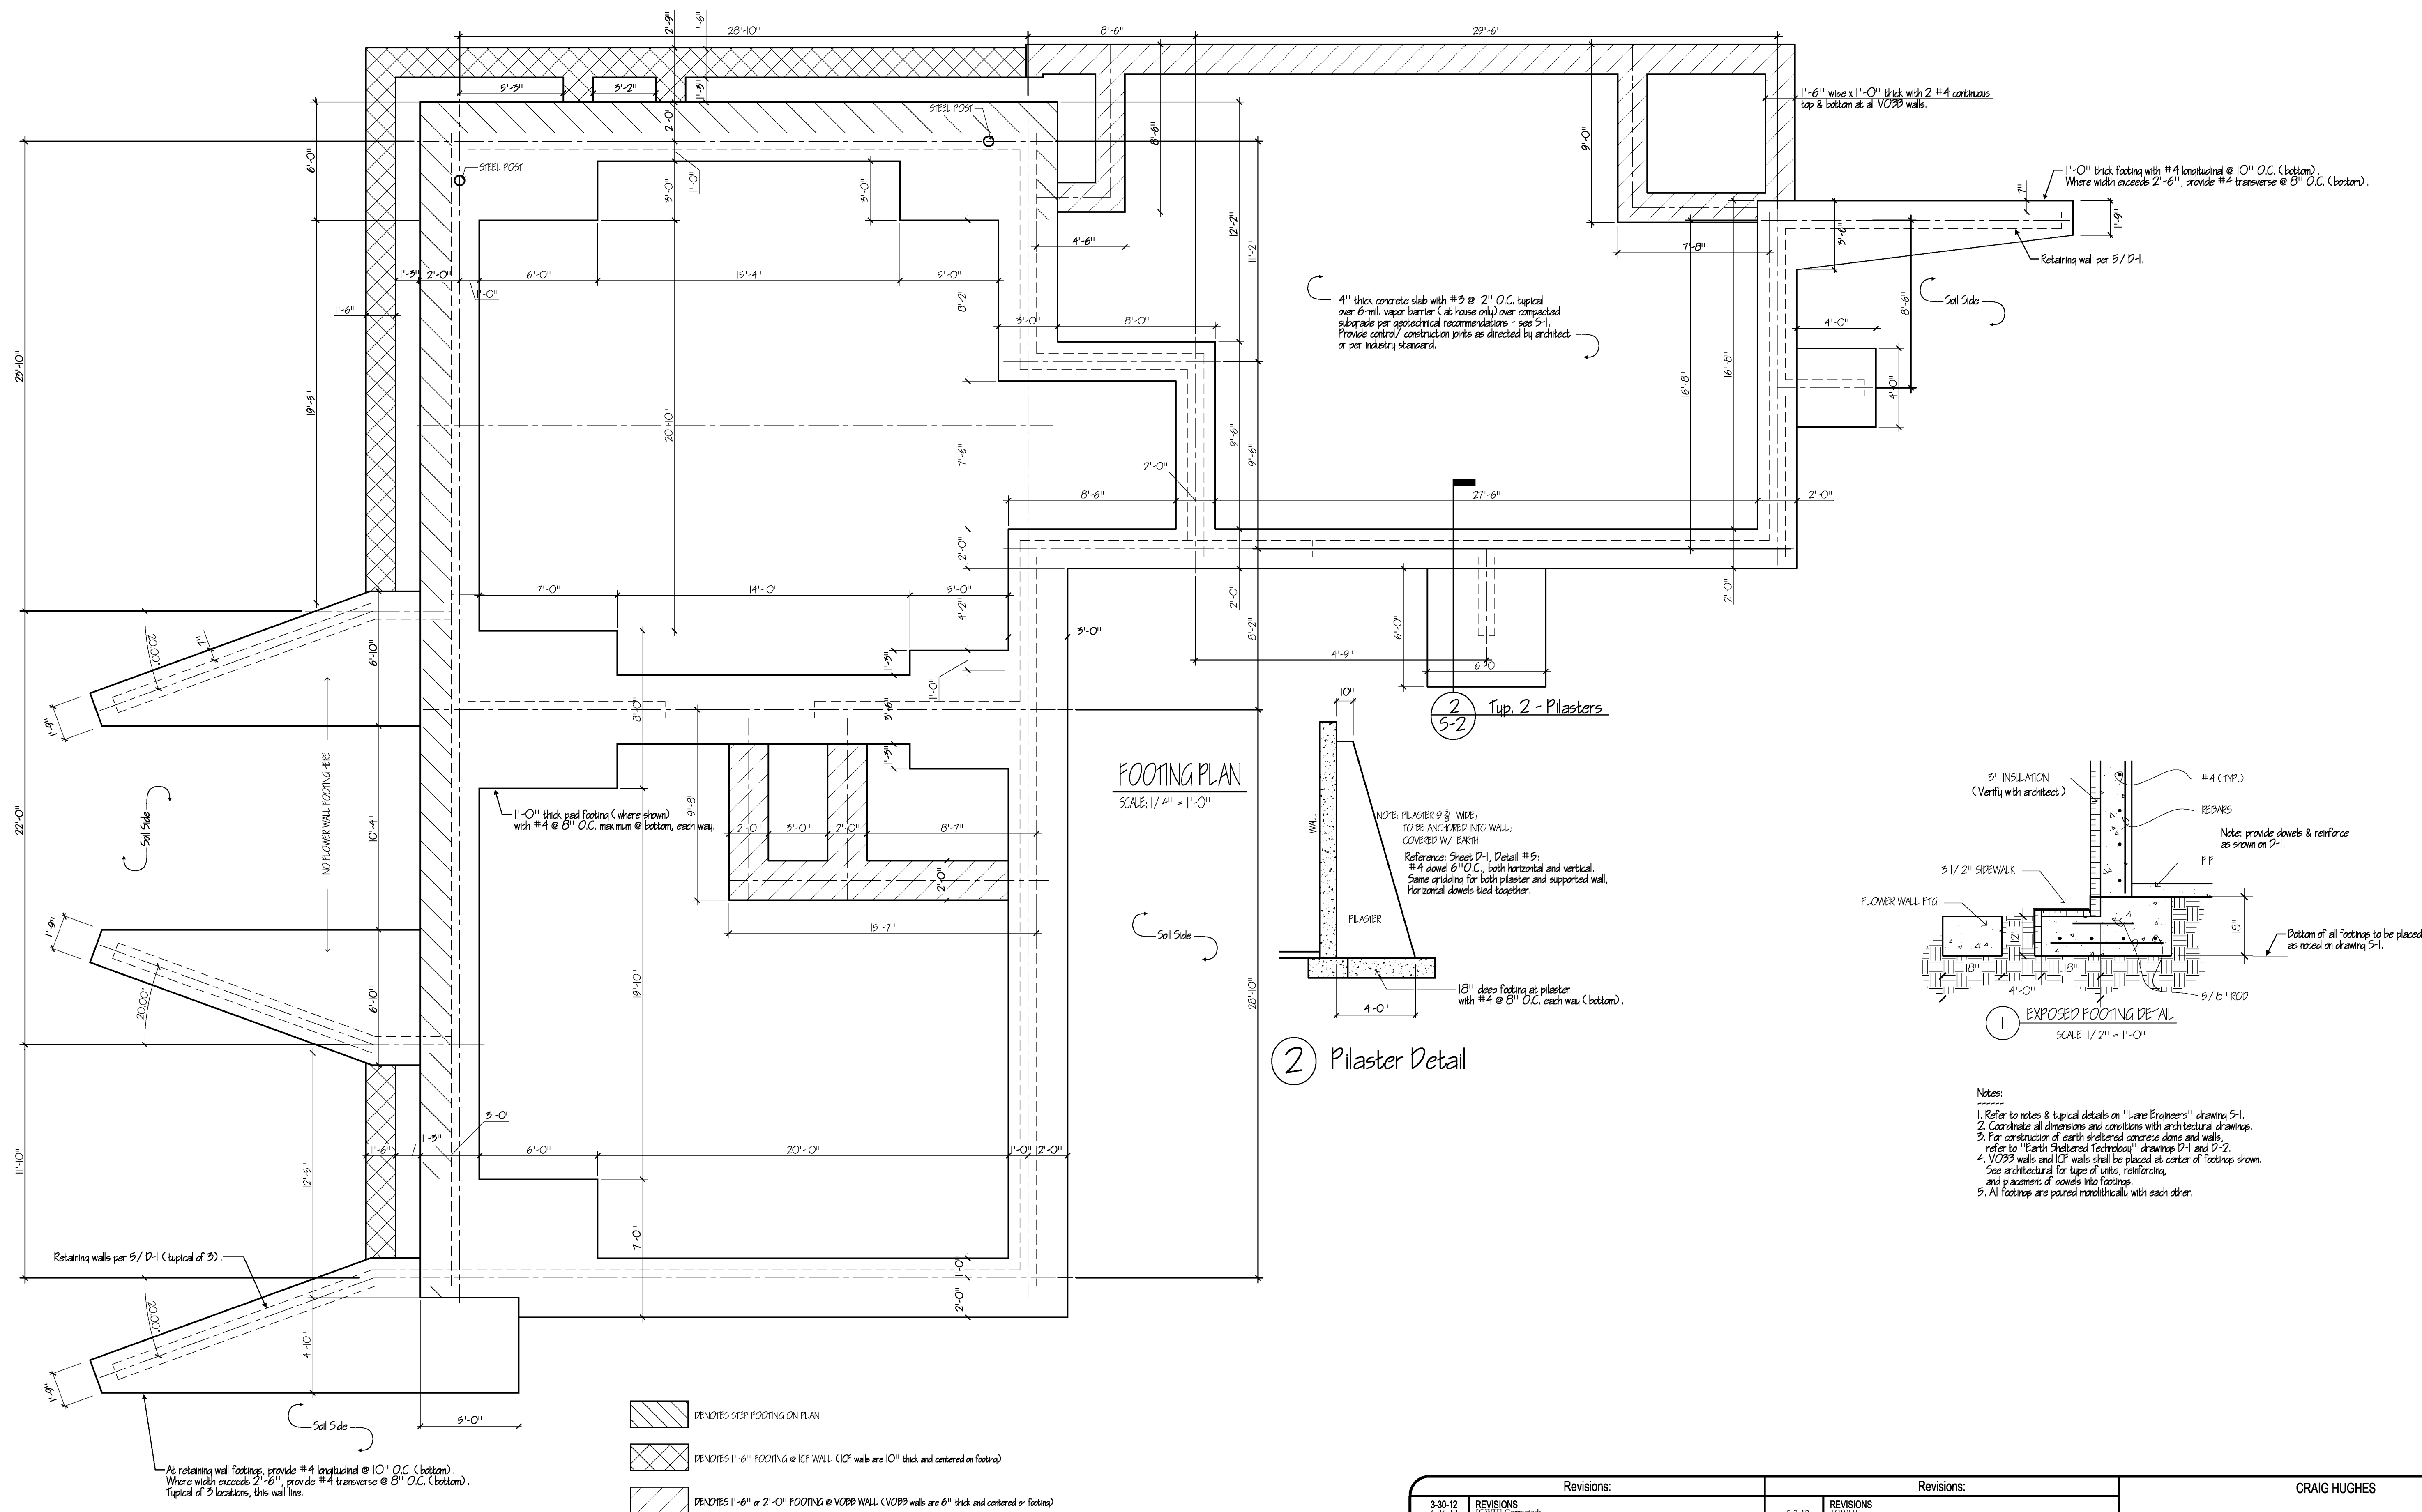

- Notes:
1. Refer to notes & typical details on "Lane Engineers" drawing S-1.
 2. Coordinate all dimensions and conditions with architectural drawings.
 3. For construction of earth sheltered concrete dome and walls, refer to "Earth Sheltered Technology" drawings D-1 and D-2.
 4. VOB walls and ICF walls shall be placed at center of footings shown. See architectural for type of units, reinforcing, and placement of dowels into footings.
 5. All footings are poured monolithically with each other.

Revisions:		Revisions:		CRAIG HUGHES	
3-30-12 4-22-12	REVISIONS [CWH] Corrected: (1) Bedroom #2 Retaining wall footings (2,3) Interior garage VOB wall footings (4a,4b) Exterior VOB wall footings (5a,5b) Exterior ICF pony wall footings (6) South steel post position [CWH] Corrected: (7) Took out jog in ICF/VOBB wall footing juncture, inserted airlock footings. (8) Put in different type of hatching for VOB wall footings and legend. (9) Changed common wall footing to 3'-6" per Dave's notes. (10) Put in ICF wall thickness, monolith pour and pilaster steel notes. (11) Put in buried wall steel post details and detail callouts.	5-7-12 5-14-12	REVISIONS [CWH] (12) Corrected step footing per Jeff: 2'-0" outside (not 1'-11"). (13) Modified north running wall footing per Dave (weirder). (14) Modified modules back and side walls (buried) footing per Dave (to match the front). (15) Indicated single pour for garage VOB wall footings per Dave. (16) Entered pilaster detail information and citation per Dave. (17) Corrected dangling measurement line/dimension identified by Dave. (18) Added/changed/removed various dimensions and notations per Dave. (19) Added airlock dimensions. [CWH] (20) Corrected south large dimensions.	Date: 4-22-11 Scale: See Plan	Drawn By: ALK
4-27-12 5-2-12		5-29-12		Earth Sheltered Technology, Inc. Po Box 5142 Mankato, Minnesota 56001	
				FOOTING PLAN	